



3.0 LITER / 1.0 GALLON AIRPOT COFFEE BREWING SYSTEM

CBS 2130 TOUCHSCREEN SERIES



CBS-2132XTS-3L
Dual Station Brewer*

CBS-2131XTS-3L
Single Station Brewer*

* Shown with D041 Airpot Dispenser (sold separately)

The 3 Liter and 1 Gallon CBS-2131 / 2132 XTS Touchscreen Series Airpot Coffee Brewers are a perfect hot beverage solution for high volume self-service environments such as convenience stores, cafeterias, specialty coffee shops or office coffee service (OCS). Now experience total control of this fully featured Extractor® Brewing System via an inviting touchscreen interface display that is intuitive, easy to read and simple to navigate.



CBS-2132XTS-1G
Dual Station Brewer*

CBS-2131XTS-1G
Single Station Brewer*

* Shown with D063 Airpot Dispenser (sold separately)

FETCO
DRIVEN TO INNOVATION

Perfect taste begins with a simple touch...

User Friendly Touchscreen

Access all controls via an inviting touchscreen interface display that blends intuitive icons with dynamic time and volume data to provide instant visual feedback at any point during programming, diagnostics or the brew cycle.



Streamlined Programming, Diagnostics and Metrics

The Extractor® Touchscreen Operating System (ETOS) was engineered for quick and efficient navigation through set-up, programming, diagnostics and daily operational brewing modes.



Customizable Screens

Customize the start screen to tie your equipment and product offerings into a consistent brand message. You can also create and display individual recipe names for quick and easy access to your most used coffee blends.




XTS™ Series

Driven by a user friendly touchscreen interface and intuitive software, the XTS series represents the next step in the evolution of FETCO's renowned EXTRACTOR brewing technology.



Cascading Spray Dome™

Hot tank water flows over clog-free channels built into the dome and virtually eliminates spray head scale buildup—a leading reason for service calls.

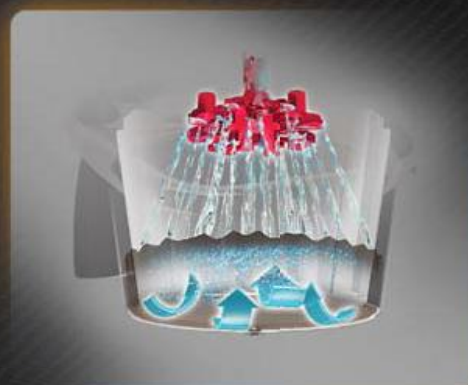

Legendary Extractor® Control

Although designed specifically for smaller batch airpot dispensing, these high quality brewers possess the legendary features and reliable performance you've come to expect from Extractor® branded products.



Contemporary Design

Sleek European cabinet design is attractive and fits well in any front-of-house decor found in cafes, lounges, OCS or corporate breakrooms.



Modern Convenience

Duplicate profiles and parameters to and from any of the batch buttons on a single machine or copy the information to an unlimited number of brewers via a removable SD card (Sold separately).



Airpot Dispensing

Designed for flexibility and portability, vacuum lined pump lever airpots quickly turn virtually any remote location into a hot and fresh beverage service station.

Vacuum Lined
Stainless Steel Airpot



Water Specification

Water Connection Inlet 3/8" Male Flare Fitting	Minimum Flow Rate 1 1/2 gpm [5.7 lpm]	Water Pressure 20-75 psig [138-517 kPa]
---	--	--

Electrical Configuration

Plastic Brew Basket Configuration Code	Stainless Steel Brew Basket Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] / Hour
E213153	E213153M	1 x 1.5 kW	100-120	1	2 G	1.1-1.6	NEMA 5-15P	10.9-13.0	3.9 [14.8] ⁽¹⁾
E213154	E213154M	1 x 1.7 kW	100-120	1	2 G	1.3-1.8	NEMA 5-15P	12.3-14.7	4.4 [16.7] ⁽¹⁾
E213151	E213151M	1 x 2.3 kW	100-120	1	2 G	1.7-2.4	NEMA 5-20P	16.5-19.7	5.8 [22.0] ⁽¹⁾
E213157	E213157M	1 x 3.0 kW	200-240	1	2 G	2.2-3.1	NEMA 6-15P	10.9-13.0	9.7 [36.7] ⁽¹⁾

UNIVERSAL VOLTAGE OPTIONS

E213171	E213171M	1 x 1.5 kW	120	1	2 G	1.6	NEMA 5-15P	13.0	3.9 [14.8] ⁽¹⁾
Optional ⁽²⁾	Optional ⁽²⁾	2 x 1.5 kW	120/208-240	1	3 G	3.1	L1 / L2 / N G	13.0	5.8 [22.0] ⁽¹⁾
E213172	E213172M	1 x 1.7 kW	120	1	2 G	1.8	NEMA 5-15P	14.7	4.4 [16.7] ⁽¹⁾
Optional ⁽²⁾	Optional ⁽²⁾	2 x 1.7 kW	120/208-240	1	3 G	3.5	L1 / L2 / N G	14.7	8.7 [33.0] ⁽¹⁾
E213173	E213173M	1 x 2.3 kW	120	1	2 G	2.4	NEMA 5-20P	19.7	5.8 [22.0] ⁽¹⁾
Optional ⁽²⁾	Optional ⁽²⁾	2 x 2.3 kW	120/208-240	1	3 G	4.7	L1 / L2 / N G	19.7	11.0 [41.6] ⁽¹⁾

(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 200°F water. 3 liters per batch.

(2) Sold with factory cord & plug for 120 Volt configuration. Optional user connection to a terminal block requiring L1, L2, N and ground to 120/208-240 VAC.


No airport locator for this group. User selectable for optional, dual in-series heater configuration.

Measurements


Height 25 3/4" [66 cm]	Width 11 3/4" [31 cm]	Depth 20 3/8" [52 cm]	Empty Weight 29 lbs [13 kg]	Filled Weight 55 lbs [25 kg]	Combined Filled Weight 66 lbs [34 kg] <small>BREWER 1 FILLED D041 DISPENSER</small>	Hot Water Tank Cap. 3.3 gal [12.4 l]	Shipping Weight: 41 lbs [18 kg]	Shipping Dimensions: 16" x 23" x 29" [41 x 59 x 74 cm]
------------------------------	-----------------------------	-----------------------------	-----------------------------------	------------------------------------	---	--	---------------------------------------	--

Dimensional Views


SIDE VIEW

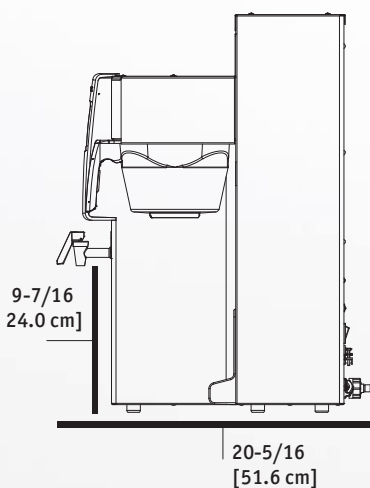


FRONT VIEW

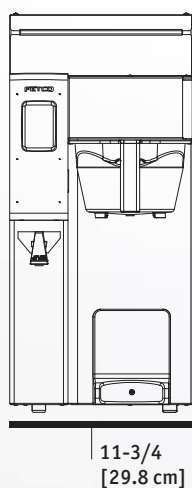

BACK VIEW

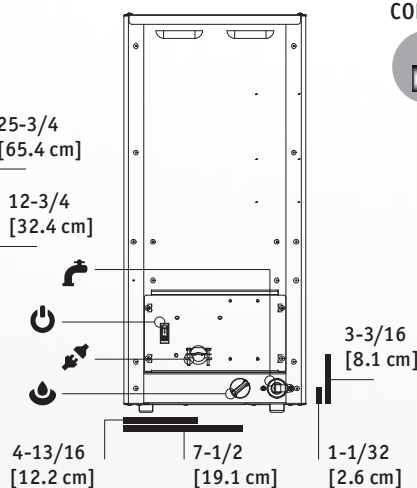


NEMA PLUGS CONFIGURATIONS



SYMBOLS

- Electrical Connector
- On / Off Switch
- Tank Drain
- Water Inlet



Cups per Hour*

8oz.	123
12oz.	82
16oz.	62
20oz.	49

Compatible Dispensers

D041
3.0L Thermal Pump
Lever Airpot

Product DIMS:
Height: 14 1/2" [36.8 cm]
Width: 7" [17.8 cm]
Depth: 9" [22.9 cm]
Weight:
Empty: 4.6 lbs [2.1 kg]
Filled: 11.1 lbs [5.1 kg]



Paper Coffee Filters

F002
13 x 5
Paper Coffee Filter



Brew Baskets

B012218B1
13 x 5
Stainless Steel



B014218BN2
13 x 5
Plastic w/ Brown Insert



* Approximate based on maximum power setting.

CBS-2132XTS-3L

Technical Specifications



Water Specification

Water Connection Inlet 1/4 Male Flare Fitting	Minimum Flow Rate 1 1/2 gpm [5.7 lpm]	Water Pressure 20-75 psig [138-517 kPa]
--	--	--

Electrical Configuration


Plastic Brew Basket Configuration Code	Stainless Steel Brew Basket Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] / Hour
E213251	E213251M	2 x 2.3 kW	200-240	1	2 G	3.3-4.7	Hardwired	16.5-19.7	11.5 [43.5] ⁽¹⁾
E213252	E213252M	2 x 3.0 kW	200-240	1	2 G	4.2-6.1	Hardwired	21.3-25.5	14.0 [53] ⁽¹⁾

(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 200°F water. 3 liters per batch.

Measurements

Height 25 3/4 [66 cm]	Width 19 3/4 [50 cm]	Depth 20 3/8 [52 cm]	Empty Weight 47 lbs [21 kg]	Filled Weight 92 lbs [41 kg]	Combined Filled Weight 114.4 lbs [51 kg] BREWER 2 FILLED D041 DISPENSERS	Hot Water Tank Cap. 5.8 gal [22.1 l]	Shipping Weight: 58 lbs [26 kg]	Shipping Dimensions: 23 x 25 x 29 [59 x 64 x 74 cm]
-----------------------------	----------------------------	----------------------------	-----------------------------------	------------------------------------	--	--	------------------------------------	--

Dimensional Views

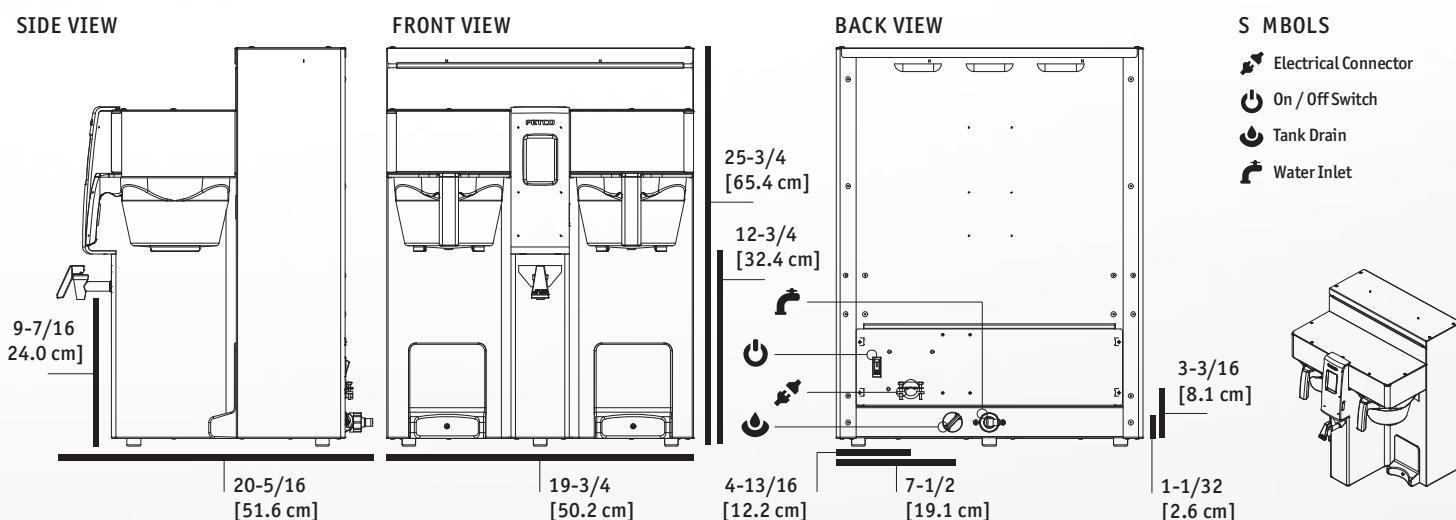

Cups per Hour* Compatible Dispensers Paper Coffee Filters Brew Baskets

8oz. 224	D041 3.0L Thermal Pump Lever Airpot	F002 13 x 5 Paper Coffee Filter	B012218B1 13 x 5 Stainless Steel	B014218BN2 13 x 5 Plastic w/ Brown Insert
12oz. 149	Product DIMS: Height: 14 1/2 [36.8 cm] Width: 7 [17.8 cm] Depth: 9 [22.9 cm] Weight: Empty: 4.6 lbs [2.1 kg] Filled: 11.1 lbs [5.1 kg]			
16oz. 112				
20oz. 90				

* Approximate based on maximum power setting.

MANUFACTURED
IN THE USA



CBS-2131XTS-1G

Technical Specifications



Water Specification

Water Connection Inlet 3/8 Male Flare Fitting	Minimum Flow Rate 1 1/2 gpm [5.7 lpm]	Water Pressure 20-75 psig [138-517 kPa]
--	--	--

Electrical Configuration

Plastic Brew Basket Configuration Code	Stainless Steel Brew Basket Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] / Hour
E213152	E213152M	1 x 2.3 kW	100-120	1	2 G	1.7-2.4	NEMA 5-20P	16.5-19.7	5.8 [22.0] ⁽¹⁾
E213158	E213158M	1 x 3.0 kW	200-240	1	2 G	2.2-3.1	NEMA 6-15P	10.9-13.0	9.7 [36.7] ⁽¹⁾

UNIVERSAL VOLTAGE OPTIONS

E213174	E213174M	1 x 1.5 kW	120	1	2 G	1.6	NEMA 5-15P	13.0	3.9 [14.8] ⁽¹⁾⁽³⁾
Optional ⁽²⁾	Optional ⁽²⁾	2 x 1.5 kW	120/208-240	1	3 G	3.1	L1 / L2 / N G	13.0	5.8 [22.0] ⁽¹⁾⁽³⁾
E213175	E213175M	1 x 1.7 kW	120	1	2 G	1.8	NEMA 5-15P	14.7	4.4 [16.7] ⁽¹⁾⁽³⁾
Optional ⁽²⁾	Optional ⁽²⁾	2 x 1.7 kW	120/208-240	1	3 G	3.5	L1 / L2 / N G	14.7	8.7 [33.0] ⁽¹⁾⁽³⁾
E213176	E213176M	1 x 2.3 kW	120	1	2 G	2.4	NEMA 5-20P	19.7	5.8 [22.0] ⁽¹⁾⁽³⁾
Optional ⁽²⁾	Optional ⁽²⁾	2 x 2.3 kW	120/208-240	1	3 G	4.7	L1 / L2 / N G	19.7	11.0 [41.6] ⁽¹⁾⁽³⁾

(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 200°F water. 1 gallon per batch.

(2) Sold with factory cord & plug for 120 Volt configuration. Optional user connection to a terminal block requiring L1, L2, N and ground to 120/208-240 VAC.

No airport locator for this group. User selectable for optional, dual in-series heater configuration.


(3) 3 liters per batch.

Measurements


Height	Width	Depth	Empty Weight	Filled Weight	Combined Filled Weight	Hot Water Tank Cap.	Shipping Weight:	Shipping Dimensions:
27 3/4 [71 cm]	11 3/4 [31 cm]	20 3/8 [52 cm]	29 lbs [13 kg]	55 lbs [25 kg]	66 lbs [35 kg] BREWER 1 FILLED D063 DISPENSER	3.3 gal [12.4 l]	41 lbs [18 kg]	16 x 23 x 29 [41 x 59 x 74 cm]

Dimensional Views


SIDE VIEW

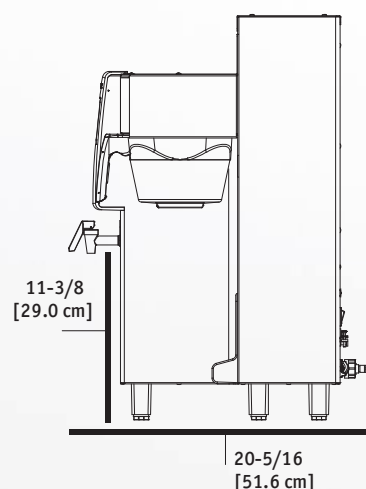


FRONT VIEW

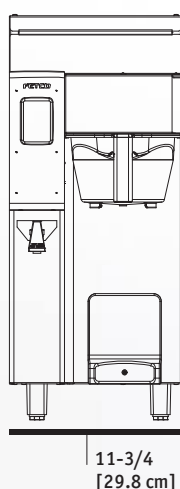

BACK VIEW

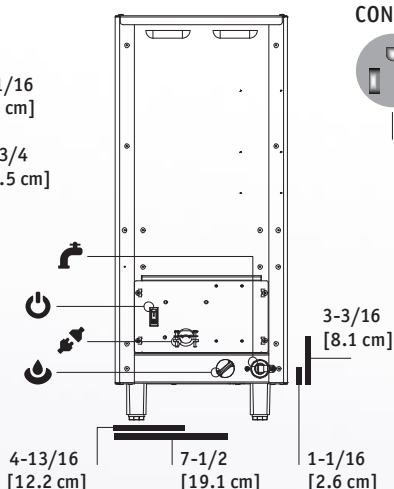


NEMA PLUGS CONFIGURATIONS



SYMBOLS

- Electrical Connector
- On / Off Switch
- Tank Drain
- Water Inlet



Cups per Hour* Compatible Dispensers Paper Coffee Filters Brew Baskets

8oz. 123	D063 1G Thermal Pump Lever Airpot	F002 13 x 5 Paper Coffee Filter	B012218B1 13 x 5 Stainless Steel	B014218BN2 13 x 5 Plastic w/ Brown Insert
12oz. 82	Product DIMS: Height: 16 1/2 [47 cm] Width: 7 [17.8 cm] Depth: 9 [22.9 cm] Weight: Empty: 9 lbs [4.1 kg] Filled: 13.3 lbs [6 kg]			
16oz. 62				
20oz. 49				

* Approximate based on maximum power setting.

Designs, materials, specifications, physical dimensions, firmware and software protocol for equipment or replacement parts are subject to review and change by FETCO without notice.
Patents: 6,148,717 & 6,565,906 & 6,576,282. Other Patents pending.

CBS-2132XTS-1G

Technical Specifications



Water Specification

Water Connection Inlet 1/4 Male Flare Fitting	Minimum Flow Rate 1 1/2 gpm [5.7 lpm]	Water Pressure 20-75 psig [138-517 kPa]
--	--	--

Electrical Configuration

Plastic Brew Basket Configuration Code	Stainless Steel Brew Basket Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] / Hour
E213253	E213253M	2 x 3.0 kW	200-240	1	2 G	4.2-6.1	Hardwired	21.3-25.5	14.0 [53] ⁽¹⁾


(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 200°F water. 1 gallon per batch.

Measurements


Height 27 3/4 [71 cm]	Width 19 3/4 [51 cm]	Depth 20 3/8 [52 cm]	Empty Weight 47 lbs [21 kg]	Filled Weight 92 lbs [42 kg]	Combined Filled Weight 115 lbs [52 kg] BREWER 2 FILLED D063 DISPENSERS	Hot Water Tank Cap. 5.8 gal [22.1 l]	Shipping Weight: 58 lbs [26 kg]	Shipping Dimensions: 23 x 25 x 29 [59 x 64 x 74 cm]
-----------------------------	----------------------------	----------------------------	-----------------------------------	------------------------------------	--	--	---------------------------------------	---

Dimensional Views


SIDE VIEW

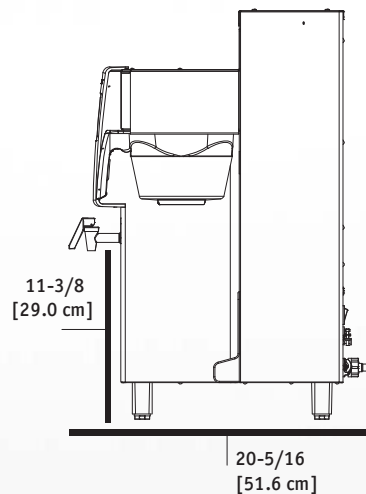

FRONT VIEW

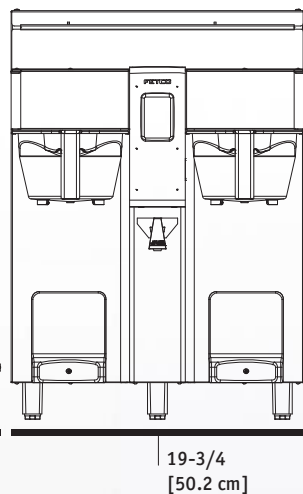


BACK VIEW

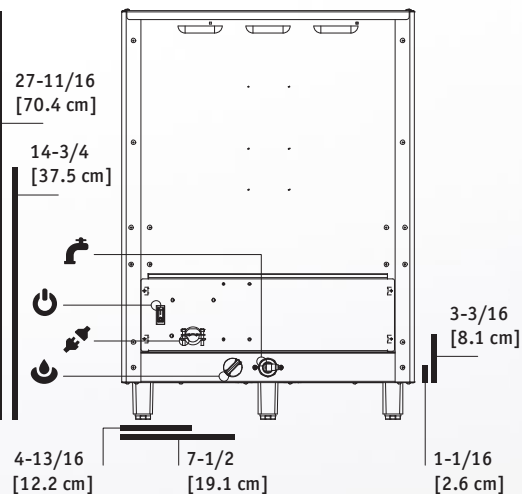

5 MBOLS

- Electrical Connector
- On / Off Switch
- Tank Drain
- Water Inlet



Cups per Hour*

8oz.	224
12oz.	149
16oz.	112
20oz.	90

Compatible Dispensers

D063
1G Thermal Pump
Lever Airpot

Product DIMS:
Height: 16 1/2 [47 cm]
Width: 7 [17.8 cm]
Depth: 9 [22.9 cm]
Weight:
Empty: 9 lbs [4.1 kg]
Filled: 13.3 lbs [6 kg]



Paper Coffee Filters

F002
13 x 5
Paper Coffee Filter



Brew Baskets

B012218B1
13 x 5
Stainless Steel



B014218BN2
13 x 5
Plastic w/ Brown Insert



* Approximate based on maximum power setting.

MANUFACTURED
IN THE USA



Features & Benefits



	Feature	Benefit
1	Touchscreen Interface	Allows for quick and easy access to brew controls.
2	Brew Basket Sensors	Automatically discontinues operation of brew cycle if basket is removed.
3	Mixed Material Construction	Mixed material is attractive and comfortable in any front-of-house setting.
4	Manual Water Faucet	Safely dispenses hot water away from steam and brew basket.
5	Stainless Steel Finish	Withstands the harshest foodservice environments and is durable and easy to clean.
6	Fixed Dispenser Guide	Helps position airport directly under brew basket drip hole for spill free brewing.



Dispensers sold separately.

FETCO

© Copyright 2014 FETCO®. Driven to Innovation™
is a mark of Food Equipment Technologies Company.

 fetco.com

SS14010

 847.719.3000
1.800.338.2699 USA
 847.719.3001

 Food Equipment Technologies Co.
600 Rose Road
Lake Zurich, IL 60047
USA